

subzero.com

FEATURES

- Custom front panels and hardware allow for infinite design options.
- Point-of-use refrigeration that can be placed anywhere in the home.
- Redesigned sleek, minimalist interior is lit by LEDs to reduce heat.
- Interactive control panel with touch screen and precise temperature control.
- Air purification system reduces odors, bacteria, viruses and ethylene gas.
- Internal dispenser provides filtered, chilled water.
- Advanced water filtration system.
- Adjustable shelves are engineered for liquid nano-retention, so spills stay put.
- Crisper drawers provide a lowertemperature, higher-humidity freshness preservation zone.
- Informational freshness cards inside the refrigerator for easy reference.
- Dampened hinges.
- Smart Grid ready.
- Star-K certified.



MODEL OPTIONS

REFRIGERATOR Model

ICBIC-30RID

INTERIOR FEATURES

REFRIGERATOR

- 3 Adjustable glass shelves
- 2 Crisper drawers with dividers
- Deli drawer with dividers
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

ACCESSORIES

- Stainless steel front panels with tubular or pro handles and 102 mm or 152 mm toe kick.
- Stainless steel tubular and pro handles.
- Dual installation kit.
- Dozen egg container.

Accessories available through an authorized Sub-Zero dealer.





ELECTRICAL

- LEFT SIDE OF OPENING

- 318 mm -

FLOOR

subzero.com

108 mm

SPECIFICATIONS	
PRODUCT Dimensions Weight	762 W x 2134 H x 610 D 181 kg
CAPACITY Refrigerator	475 L
ELECTRICAL Supply Service	220-240 V AC, 50/60 Hz 10 amp circuit
PLUMBING Supply Pressure	^{1/4"} OD copper, braided stainless steel or PEX tubing 2.4-8.3 bar


Overall dimensions do not include panels or handles. Dimensions will vary with panel thickness.

The depth of each integrated model is 610 mm. Allow for panel thickness when planning the finished opening depth.

Specifications are subject to change without notice.

Dimensions may vary ±3 mm.

DIMENSIONS



– 143 mm

724 mm


6 mm PLUMBING RIGHT SIDE OF OPENING

114 mm



INSTALLATION

45 mm

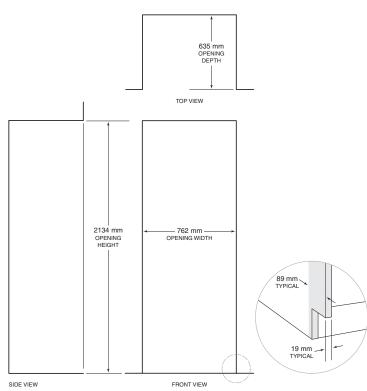

NOTE: Shaded areas will be visible and should be finished to match cabinetry.